

FAST PUSH SC Connector

Features

- Nickel plated brass body
- Telcordia style boots
- Free-floating ceramic ferrule
- Boots and housing in green color
- Low insertion loss and back reflection loss
- Precision anti-rotation key and corrosion resistant body

Application

- CATV
- Metro
- Test equipment
- Premise installations
- Data processing networks
- Telecommunication networks
- Local Area Networks (LANs)
- Wide Area Networks (WANs)
- Active device termination


Standards

All components of/and the final product are designed and tested to conform the requirements of IEC 60874-7, CECC 86115-801, Bellcore/Telcordia GR-326, EIA/TIA 604-3A, EIA/TIA 568, ISO/IEC 11801 2nd Ed., EN 50173, JIS C5973 F04, ICEA-596, IEC60793-2-10 A1a, ITU-T G.651 or IEC60793-2-10 A1b or ITU-T G.652 (depending on fiber), Belcore/Telcordia GR-409-CORE, IEC 793, IEC 794-1-E1, IEC 794-1-E3, UL1666/901 (UL-cable) and EIA/TIA455.

Availability

- The connector can be supplied as a pre-assembled one-piece connector or as connector kits.
- Clips are available for duplex connectors
- Housing kits without ferrule are available.

Specification

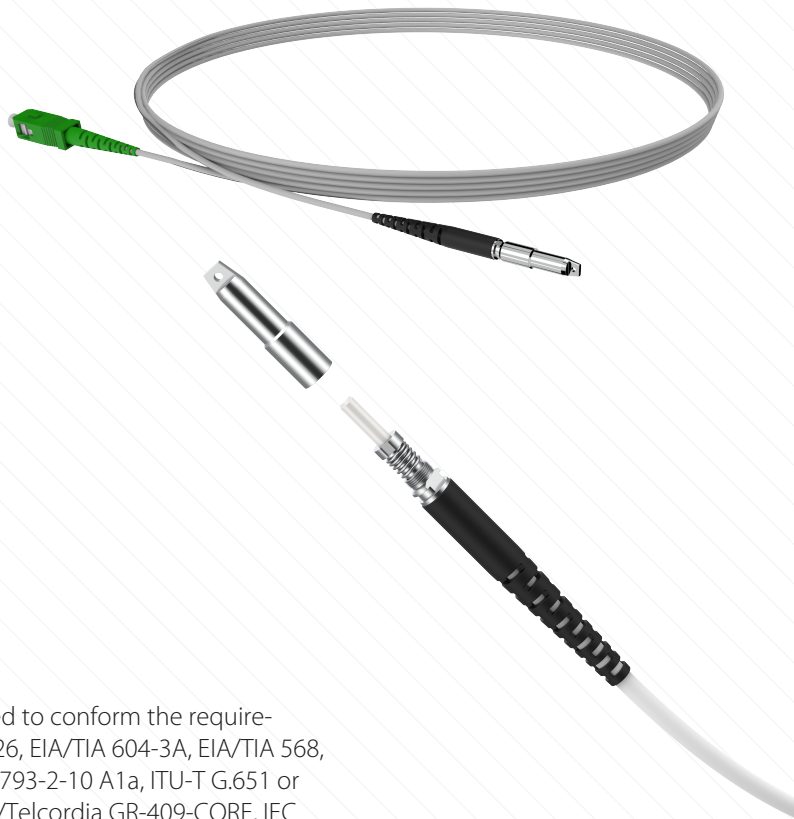

Item	APC	PC
Insertion Loss	≤0.30dB	≤0.30dB
Return Loss	≥60dB	≥50dB
Durability	≤0.2dB typical change, 1000 matings	≤0.2dB typical change, 1000 matings
Operating Temperature	-40°C ~ 85°C	-40°C ~ 85°C
Ferrule Hole Sizes	125.0+1/-0μm, Concentricity: ≤0.5μm	125.0+1/-0μm, Concentricity: ≤1.0μm
	125.5+1/-0μm, Concentricity: ≤0.5μm	125.3+1/-0μm, Concentricity: ≤1.0μm
	126.0+1/-0μm, Concentricity: ≤0.5μm	125.5+1/-0μm, Concentricity: ≤1.0μm
		126.0+1/-0μm, Concentricity: ≤1.0μm